

HDMI分配器用户手册

特别提示

在使用本产品之前, 请务必先仔细阅读本使用说明书。

请务必妥善保管好本书, 以便日后能随时查阅。


请在充分理解内容的基础上, 正确使用。

本公司保留对产品进行更改的权利, 由于技术更新产品参数变化恕不另行通知。

产品简介


2Port HDMI分配器可将一路HDMI源信号可靠地分配至2个显示设备。2Port HDMI分配器支持HDMI参数标准, 包括高达10.2Gbps的数据速率、12位的色深、3D、唇型同步和高清无损的音频格式。分配器支持 1080P的 PC 分辨率。2Port HDMI分配器非常适用于需要将一路HDMI信号源分配至2台显示设备的应用环境。

接口说明

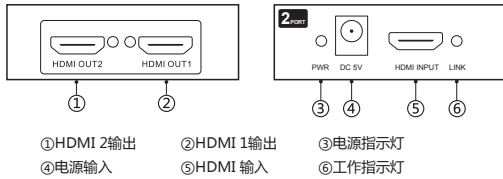

(以产品实物为准)

连接示意图

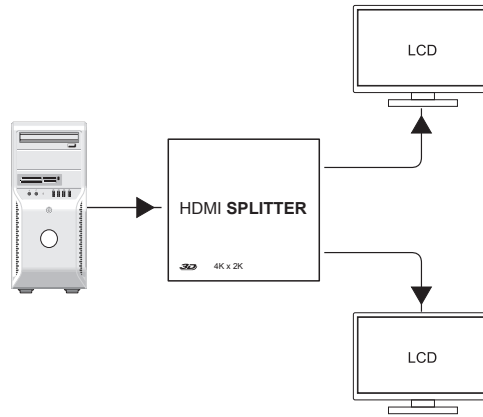

使用说明

1. 通过一条HDMI线缆, 把HDMI信号源和分配器的输入口连接起来。
2. 通过HDMI线缆, 把分配器的输出端与显示器连接起来。
3. 连接电源。
4. 即可正常工作。

功能特点

- 1路HDMI信号输入分配成2路HDMI信号输出;
- 支持3D视频格式;
- 支持1080P@60Hz 信号输入输出;
- 支持24/30/36 位色深;
- 支持HDCP设备;
- 支持3840×2160/30Hz 的分辨率;
- 音频格式LPCM7.1/DTS/DOLBY-AC3/DSD/DTS-HD/Dolby-trueHD.

产品规格

输入接口: HDMI×1(母)

输出接口: HDMI×2(母)

供电接口: DC-005×1(母) 外接USB供电

HDMI视频输入分辨率: 480I, 480P, 576I, 576P, 720I, 720P, 1080I, 1080P, 4K

HDMI视频输出分辨率: 480I, 480P, 576I, 576P, 720I, 720P, 1080I, 1080P, 4K

支持电源: DC 5V/0.5A

工作温度: 0~40°C

外壳: 金属外壳+喷油丝印

产品尺寸: 65×61×21mm

包装方式: 包装盒

安全使用须知

为确保设备可靠使用及人员的安全, 请在安装、使用和维护时, 请遵守以下事项:

- 请勿在下列场所使用本产品: 有灰尘、油烟、导电性尘埃、腐蚀性气体、可燃性气体的场所; 暴露于高温、结露、风雨的场所; 有振动、冲击的场所。电击、火灾、误操作也会导致产品损坏和恶化;

- 避免带电状态进行接线、插拔电缆插头, 否则容易导致电击, 或导致电路损坏;

- 安装和接线必须牢固可靠, 接触不良可能导致误操作;

- 本产品通过电源线的接地导线接地, 为避免电击, 必须将接地导线与大地相连, 在对本产品的输入端或输出端进行连接之前, 请务必将本产品正确接地;

- 必须将外部电源全部切断后, 才能进行安装、接线等操作, 否则可能引起触电或设备损坏;

- 在下列情况下, 请立即断开电源, 并与公司联系:

1. 设备进水;
2. 设备摔坏或机壳破裂;
3. 设备工作异常或展示的性能已完全改变;
4. 设备产生气味、烟雾或噪音。

- 请不要自己修理设备, 除手册中有明确指示外。

HDMI Splitter User Manual

Special Notification

Before using this product, please read this manual carefully.


Please keep this manual for future reference.

The company may change the fuction of product without notice.

Product Description


2 Ports HDMI splitter duplicates one way HDMI source to two displays. Its supported features including up to 10.2Gbps data rate, 12bit deep color, 3D, Lipsync and high definition lossless audio. This HDMI splitter support 1080P PC resolution. It is best for use to transmute one HDMI signal to two displays.

Interface Description

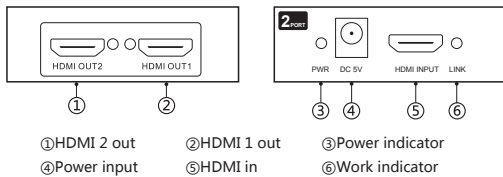

(To prevail in kind)

Connection Diagram

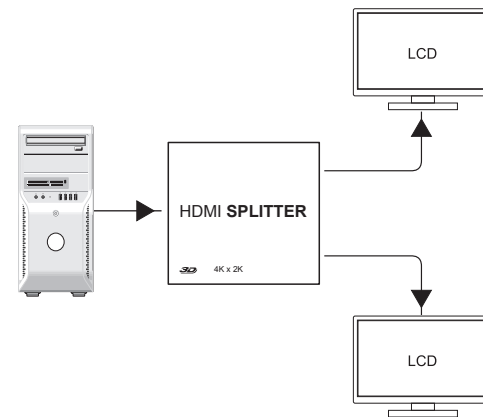

Use Instructions

1. With a HDMI cable, connect the HDMI signal source to the input port of the distributor;
2. With HDMI cable, the output of the distributor is connected to the monitor;
3. Connected power supply;
4. Can work normally.

Function

- 1 HDMI signal input into 2 HDMI signal output;
- Support 3D video format;
- Support 1080P@60Hz signal input and output;
- Support 24/30/36 bit;
- Support for HDCP;
- Supports 3840x2160/30Hz resolution;
- Audio format LPCM7.1/DTS/DOLBY-AC3/DSD/DTS-HD/Dolby-trueHD.

Product Specifications

Input interface: HDMI×1(Female)

Output interface: HDMI×2(Female)

Power supply interface: DC-005×1(Female) External USB power supply

HDMI input resolution: 480I, 480P, 576I, 576P, 720I, 720P, 1080I, 1080P, 4K

HDMI output resolution: 480I, 480P, 576I, 576P, 720I, 720P, 1080I, 1080P, 4K

Support power supply: DC 5V/0.5A

Working temperature: 0~40°C

Shell: Metal Case + Spray screen

Product size: 65×61×21mm

Packing: packing box

The matters needing attention of installation

In order to ensure the reliable performance of the equipment and the safety of the user, please observe the following matters during the process of installation, use and maintenance.

- Please do not use this product in the following places: the place of dust, soot and electric conductivity dust, corrosive gas, combustible gas; the place exposed to high temperature, condensation, wind and rain; the occasion of vibration and impact. Electric shock, fire, wrong operation can lead to damage and deterioration to the product, either;

- Should avoid wiring and inserting cable plug in charged state, otherwise it is easy to cause the shock, or electrical damage;

- The installation and wiring should be strong and reliable, contact undesirable may lead to false action;

- This product grounds by the grounding wires. To avoid electric shocks, grounding wires and the earth must be linked together. Before the connection of input or output terminal, please make sure this product is correctly grounded;

- Only after cutting down all external power source, can install, wiring operation begin, or it may cause electric shock or equipment damage;

- Please do not dismantle the equipment, avoid damaging the internal electrical component.